

Sugino Corp.

1380 Hamilton Parkway

Itasca, IL 60143

Phone: (630) 250-8585

Fax: (630) 250-8665

Toll Free: 1-888-784-4661 (888-SUGINO1)

Email: mach@suginocorp.com


Varimotor Spindles

High Rigidity Spindle Motor Varimotor

The same high-rigidity and high-power DC brushless motor and precise angular bearing as the Selffeeder Varimec are utilized. It is compact sized spindle unit and capable of doing heavy cut processing.

Application

- Install into spindle unit for drilling and end-milling operation
- Install into robot for de-burring operation.
- Install into special purpose machine for various cutting operations.

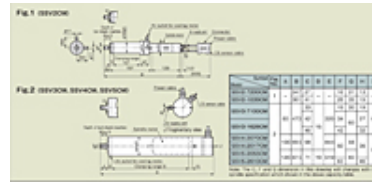

Results 1 - 8 of 8

Model #	Spindle Speed (no load)	Chuck Type	Chucking Capacity	Aluminum Max. Drilling Size (ADC)	Cast Iron Max. Drilling Size (FC200)	Steel Max. Drilling Size (S45C)
SSV2-7200CM	2,000 ~ 20,000 min ⁻¹	ER11MS	0.5 ~ 7.0 mm	5 mm	4 mm	3.5 mm
SSV2-1039CM	390 ~ 3900 min ⁻¹	ER16	0.5 ~ 10.0 mm	8.5 mm	7.5 mm	6.5 mm
SSV3-7100CM	1000 ~ 10000 min ⁻¹	ER11 ER20	0.5 ~ 13.0 mm 0.5 ~ 7.0 mm	6.5 mm	5 mm	4 mm
SSV3-1626CM	265 ~ 2650 min ⁻¹	ER20 ER25	0.5 ~ 13.0 mm 0.5 ~ 16.0 mm	12 mm	9 mm	8 mm
SSV4-2070CM	1000 ~ 7000 min ⁻¹	ER32	1.0 ~ 20.0 mm	9 mm	8 mm	7 mm
SSV4-2017CM	250 ~ 1750 min ⁻¹	ER32	1.0 ~ 20.0 mm	16 mm	15 mm	13 mm
SSV5-2055CM	800 ~ 5500 min ⁻¹	ER32	1.0 ~ 20.0 mm	14.5 mm	11.5 mm	9.5 mm
SSV5-2610CM	250 ~ 1010 min ⁻¹	ER40	2.0 ~ 26.0 mm	25 mm	20.5 mm	18 mm

Results 1 - 8 of 8